



v5POS



IP54 Whole Unit



Aluminium Die-cast
Sleek Enclosure



Removable SSD

SENIOR

SENOR v5POS Series Touch POS Terminal

Senor v5POS series feature a brand new concept with an **ultra-narrow bezel-less screen** and **sleek exterior design**, with interchangeable frame and casing to match the retailer's style.




Silver colour is by order

v5POS is an **energy-efficient solution** with low power consumption on a high-performing platform. The CPU consumes less power, generates less heat and helps to keep our environment green.

With its **elegant design**, v5POS is ideally suited for the retail and hospitality industries' flagship and pop-up stores.

I/O Connector

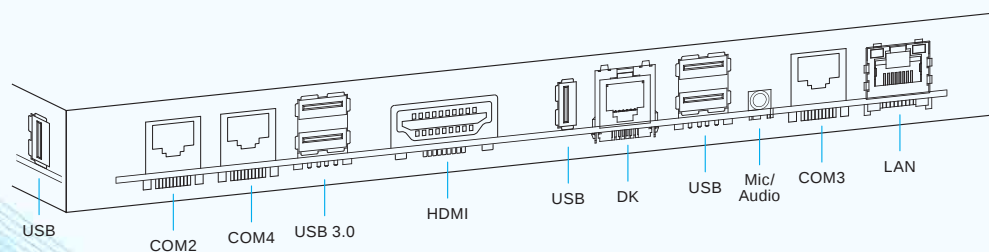


v5POS N115 / T315

3 x Serial | 1 x Cash Drawer | 6 x USB | 1 x HDMI | 1 x LAN

Optional Accessories



Wireless LAN & BT

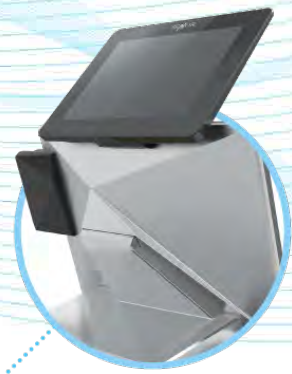

Upward Facing Display



2D Scanner



MSR / Fingerprint
/ RFID Reader




Coloured Frame*




VFD / 10" / 15"
Customer Display

Features

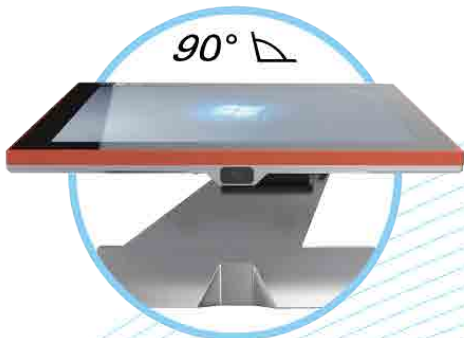

90 Degree Tilt Adjustment

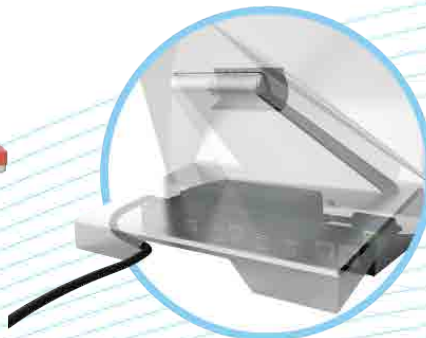

Internal Power Supply
Cable Management System



Fanless / Ventless / Screwless

* Coloured units are for special order only.



SPECIFICATIONS		v5POS N115	v5POS T315
PROCESSOR	Intel Quad Core N95 1.7 GHz (Turbo Boost up to 3.4 GHz)		Intel Dual Core i3-1215U 1.2 GHz (Turbo Boost up to 4.4 GHz)
SYSTEM MEMORY	8 GB DDR4 RAM (up to 32 GB)		8 GB DDR4 RAM (up to 64 GB)
STORAGE DEVICE	1 x 128 GB removable M.2 PCIe 2280 SSD 1 x 128 GB M.2 SATAIII 2242 SSD expansion socket		1 x 128 GB removable M.2 PCIe 2280 SSD 1 x 128 GB M.2 PCIe 2280 expansion socket
DISPLAY			
SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels		
BRIGHTNESS	350 cd/m²		
TOUCH SCREEN PANEL	Projected capacitive touch		
I/O INTERFACE			
USB PORT	4 x USB 2.0, 2 x USB 3.0		4 x USB 2.0, 2 x USB 3.0
SERIAL PORT	3 x RJ50		3 x RJ50
VIDEO PORT	1 x HDMI		1 x HDMI
AUDIO PORT	1 x 3.5 mm Mic in / Line out 2 x 2W speaker		
CASH DRAWER	1 x RJ12 (24 V)		
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps		
OPERATING SYSTEM			
WINDOWS	10 IoT / 10 Pro / 11 IoT / 11 Pro		10 IoT / 10 Pro / 11 IoT / 11 Pro
ENVIRONMENT & MECHANICAL SPECIFICATIONS			
DIMENSIONS & WEIGHT	365 (W) x 290 (H) x 193 (D) mm 5.5 kg		
CHASSIS MATERIAL	Die-cast aluminium with Nano-technology coating		
IP RATING	IP54 whole unit		
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C		
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90%		
POWER CONSUMPTION	12 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz		
MODEL OPTIONS			
INTEGRATED CARD READERS	3-track MSR, RFID (125 kHz, 13.56 MHz)		
2D SCANNER	Integrated 2D scanner with tilt adjustment		
CUSTOMER DISPLAY	10" / 15" TFT LCD or 2-line VFD		
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1		
COLOURED FRAME	Black (standard) White/Red/Green/Blue/Purple (special order)		
COLOURED UNIT	Black (standard) Gold/Silver (special order)		

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au



Quality. Safety. Versatility.