

v6WP



Removable SSD



Integrated Peripheral
Space-saving



IP54 Whole Unit
(Without Peripherals)

SEnOR

Senor v6WP Series Intelligent Touch POS Terminal


Senor v6WP Series is designed to meet the functional requirements of the users as well as having the modern appeal to enhance varied ambiances of the operating environment.

The design concept complements a user's workflow and operation of the POS unit thereby increasing productivity and efficiency. A variety of POS accessories is available, including optional customer display screen and tool free interchangeable coloured bezel.

With its **elegant design**, v6WP is ideally suited for the retail and hospitality industries' flagship and pop-up stores.



I/O Connector

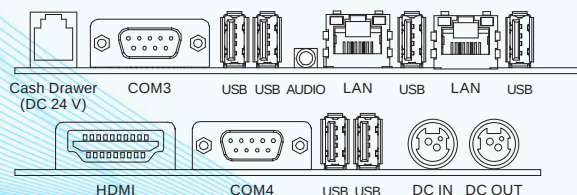

v6WP

2 x Serial | 6 x USB | 2 x LAN | 1 x HDMI
1 x Cash Drawer


Optional Accessories



MSR / Fingerprint
/ RFID Reader



Coloured Frame* / Housing*

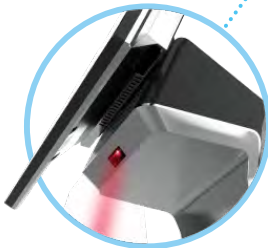

Integrated 2D Barcode
Scanner



Integrated Printer/Scanner



2D Barcode Scanner
/ RFID (NFC)



7" LCD
/ Customised Logo



VFD / 10" / 15"
Customer Display




Upward* / Downward
Customer Display




* By special order only

Features

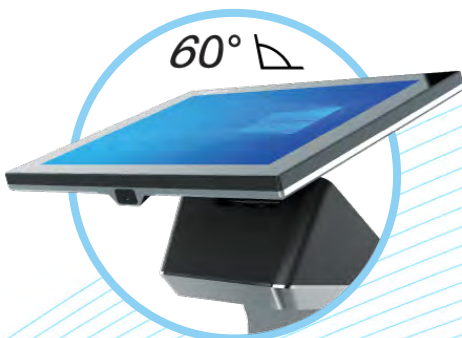

60 Degree Tilt Adjustment

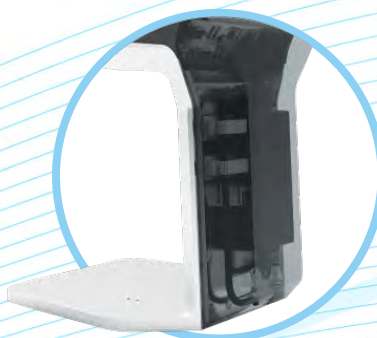

Internal Power Supply



Fanless / Screwless



SPECIFICATIONS

v6WP T715

PROCESSOR	Intel Core i7-1255U (Turbo Boost up to 4.7 GHz)
SYSTEM MEMORY	8 GB DDR4 RAM (up to 32 GB)
STORAGE DEVICE	1 x 128 GB removable M.2 PCIe 2280 SSD (supports RAID 0/1/5/10) 1 x 128 GB M.2 PCIe 2280 expansion socket

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	350 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (multi-touch)

I/O INTERFACE

USB PORT	6 x USB 2.0 1 x USB 3.0 (front panel)
SERIAL PORT	2 x DB9
VIDEO PORT	1 x HDMI 1.4
AUDIO PORT	2 x 2 W built-in speakers 1 x 3.5 mm Mic-in/Line-out
CASH DRAWER PORT	1 x RJ12 (24 V)
ETHERNET PORT	2 x RJ45 10/100/1000 Mbps

OPERATING SYSTEM

WINDOWS	10 IoT / 10 Pro / 11 IoT / 11 Pro
---------	-----------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	366 (W) x 495 (H) x 245 (D) mm 10 kg
CHASSIS MATERIAL	Die-cast aluminium
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90% (non-condensing)
POWER CONSUMPTION	24 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READERS	3-track MSR, RFID (125 kHz / 13.56 MHz), IC card reader, 2D barcode reader
CUSTOMER DISPLAY	2-line VFD or 7" / 10" / 15" TFT LCD (optional touch)
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1
COLOURED FRAME	Black (standard) White/Red/Green/Blue/Purple (special order)
COLOURED UNIT	Black (standard) Gold/Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au



Quality. Safety. Versatility.