

X1S A516



reddot winner 2020



IP54 Whole Unit



Slim 16mm Panel



Wall Mount Capable*



VESA Mount Capable*

* Mounting poles/brackets not included

SENIOR

Modern. Elegant. Award-Winning Design.

The X1S A516 series represents a stylish space-saving system that is both portable and multi-functional.

The sleek base arm is sturdy yet easily adjustable to suit many functional positions.

Easy peripherals installation
Plug and play accessories with modern USB ports.




Slim bezel
16mm slim PCT that provides seamless viewing experience.



- Ergonomic dual hinge design to suit most applications.
- Foldable design for easy storage.

I/O Connector

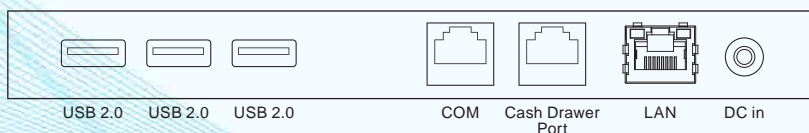

X1S A516 Standard Type

3 x USB 2.0 | 1 x COM | 1 x Cash drawer port
1 x LAN | 1 x USB 3.0 (side)

Optional Accessories



11.6" Customer Display with Accessories*



VFD Customer Display



Wireless + Bluetooth



MSR Reader



2D Barcode Reader



Printer



RFID / Fingerprint Reader

Mounting Options



Pole/VESA Mount



Wall Mount



Wall Mount with Printer

* Customer display with accessories is by special order only.



SPECIFICATIONS

X1S A516

PROCESSOR	Rockchip RK3568, Quad Core Cortex-A55, up to 2.0 GHz
SYSTEM MEMORY	4 GB LPDDR4 RAM
STORAGE DEVICE	64 GB eMMC

DISPLAY

SIZE / RESOLUTION	15.6" TFT LCD (LED backlight) / Full HD 1920 x 1080 pixels
BRIGHTNESS	230 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (16mm ultra-thin panel)

I/O INTERFACE

USB PORT	5 x USB 2.0, 1 x USB 3.0 (side)
SERIAL PORT	1 x RJ50
AUDIO PORT	2 x built-in speakers / 2 x 2 W
CASH DRAWER	1 x RJ12 (24 V)
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps

OPERATING SYSTEM

ANDROID	Android 11
LINUX	Kernel 3.0 up

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	379 (W) x 232~431 (H) x 246 (D) mm 4.0 kg
CHASSIS MATERIAL	Aluminium die-cast
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	10% to 90% (non-condensing)
POWER CONSUMPTION	19 V / 3.15 A, external power adaptor, 100-240 V, 50/60 Hz 19 V / 6.30 A, external power adaptor, 100-240 V, 50/60 Hz (integrated printer)

MODEL OPTIONS

INTEGRATED READERS	3-track MSR, Fingerprint reader, RFID (13.56 MHz), 2D image reader
CUSTOMER DISPLAY	11.6" / 15.6" FHD LCD or 2-line VFD
WIRELESS LAN	Integrated Dual Band Wi-Fi 802.11 b/g/n/ac (2x2 MIMO) + Bluetooth 4.1
COLOURS	Dark Grey (standard) White (optional)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au



Quality. Safety. Versatility.