

Yocto POS




42 mm

42 mm Slim Design



Fanless & Ventless

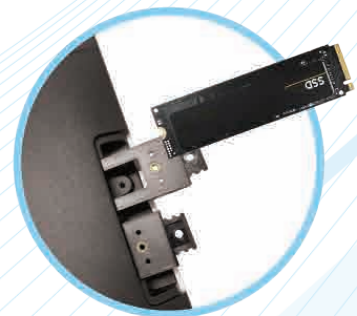

Easy Access SSD

SEÑOR



SPECIFICATIONS

	Yocto POS 6400	Yocto POS T315
PROCESSOR	Intel Celeron Quad Core J6412 2.0 GHz (Turbo Boost up to 2.6 GHz)	Intel Core i3-1215U 1.2 GHz (Turbo Boost up to 4.4 GHz)
SYSTEM MEMORY	2 x SO-DIMM socket (supports up to 32 GB)	2 x SO-DIMM socket (supports up to 64 GB)
STORAGE	1 x NVMe M.2 SSD, 1 x SATA M.2 SSD	1 x NVMe M.2 SSD, 1 x SATA M.2 SSD

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 X 768 pixels
BRIGHTNESS	300 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (multi-touch)

I/O INTERFACE

USB PORT	5 x USB 2.0, 3 x USB 3.2, 1 x USB 3.2 Type-C, 1 x Power USB 24 V
SERIAL PORT	3 x RJ48 (DC 5 V / 12 V selectable)
AUDIO PORT	1 x 2 W speaker 1 x line-out
NETWORK PORT	1 x RJ45 10/100/1000 Mbps
CASH DRAWER PORT	1 x RJ12 (24 V)

OPERATING SYSTEM

WINDOWS	10 IoT / 10 Pro
---------	-----------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	346 (W) x 334 (H) x 221 (D) mm 7.0 kg
CHASSIS MATERIAL	Heat-dissipating solid aluminium die-cast casing
VESA PATTERN	75 x 100 mm
TEMPERATURE	Operating: 0°C to 35°C Storage: -20°C to 60°C
HUMIDITY	20% to 80% (non-condensing)
POWER CONSUMPTION	19 V / 4.7 A, external power adapter, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READER	3-track MSR, RFID, 2D scanner
CUSTOMER DISPLAY	9.7" TFT LCD or 2-line VFD
COLOURED UNIT	Black (standard) Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au

SENIOR
TOUCH SCREEN SOLUTIONS

Quality. Safety. Versatility.