

cSPOS



Integrated Printer[#]
Space-saving



Removable SATA SSD



IP54 Whole Unit



SEÑOR

Maintain your competitive edge with the cSPOS

Leveraging on Senor's wealth of experience and technology know-how, the cSPOS brings the next level of innovation and precision to deliver greater efficiency, productivity and quality output.




Boasting a sleek **bezel-less screen**, the cSPOS complements and enhances the aesthetic surroundings whilst combining the differential advantages of a Senor product to boost commercial activities in a result-driven market.

A **fanless and ventless all-in-one** touch system enclosed in a heat-dissipating solid aluminium die-cast casing, the cSPOS is rated IP54, certifying high protection against liquid and dust particles to provide for durability and sustainability.

Providing **enhanced safety features**, the cSPOS has concealed mounting hardware and internal cable management, alongside sophisticated designs, giving your point of sale hardware a professional and state of the art finish.




I/O Connector

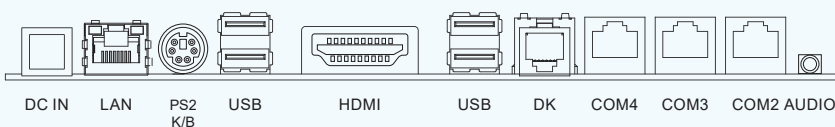

cSPOS 650 no base

3 x RJ50 Serial | 4 x USB 2.0 | 1 x HDMI | 1 x Cash Drawer

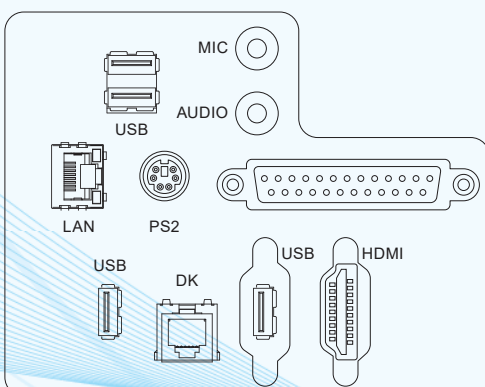

cSPOS 650 with base

2 x DB9 Serial (via DB25 adaptor) | 3 x USB 2.0 | 1 x HDMI | 1 x Cash Drawer

Features



Optional Accessories



MSR / Fingerprint / RFID Reader



10" / 15" LCD Customer Display



VFD Customer Display

* Optional configuration * Coloured units are for special order only.



SPECIFICATION

cSPOS 650

PROCESSOR	Intel Celeron 3965U (2M Cache, 2.2 GHz)
SYSTEM MEMORY	2 x SODIMM DDR4 (supports DDR4 2133, up to 32 GB)
STORAGE DEVICE	1 x removable M.2 PCIe SSD (supports RAID) / 1 x removable M.2 SATA SSD

DISPLAY

SIZE/RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	350 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (multi-touch)

I/O INTERFACE

USB PORT	Front: 1 x USB 3.0 Back: 3 x USB 2.0
SERIAL PORT	2 x DB9 (optional: up to 4)
VIDEO	1 x HDMI
AUDIO	1 x 3.5 mm mic in / line out 2 x 1 W speaker
CASH DRAWER	1 x RJ11 (DC 24 V)
ETHERNET	1 x RJ45 10/100/1000 Mbps

OPERATING SYSTEM

WINDOWS	10 IoT (64-bit) / 10 Pro (64-bit)
----------------	-----------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	Desktop: 380 (W) x 351 (H) x 219 (D) mm 7.0 kg
	VESA mount: 380 (W) x 295 (H) x 94 (D) mm 6.0 kg
	WP: 380 (W) x 450 (H) x 250 (D) mm 12.0 kg
VESA PATTERN	75 x 75 mm / 100 x 100 mm
CHASSIS MATERIAL	Die-cast aluminium
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 20% to 80% Storage: 10% to 90%
POWER CONSUMPTION	12 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READERS	3-track MSR, RFID (supports MIFARE one and MIFARE CPU card), IC card reader
CUSTOMER DISPLAY	VFD / 9.7" LCD / 15" LCD
WIRELESS LAN	Wi-Fi 802.11 b/g/n/ac
WP BASE	Integrated Senor TP250III Thermal Printer (USB/Serial)
COLOURED FRAME	Black (standard) Red / Green (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au



Quality. Safety. Versatility.