

x5POS



reddot winner 2020



IP54 Whole Unit



Ultra-thin 10mm Panel



Integrated Thermal Printer*



VESA Mount

* Optional

SEÑOR

Modern. Elegant. Award-Winning Design.

The x5POS series represents a stylish space-saving system that is both portable and multi-functional.



The sleek base arm is sturdy yet easily adjustable to suit many functional positions.

Easy peripherals installation
Plug and play accessories with modern USB ports.




Ultra-thin bezel
On-cell PCT that provides seamless viewing experience.



- Ergonomic dual hinge design to suit most applications.
- Foldable design for easy storage.

I/O Connector

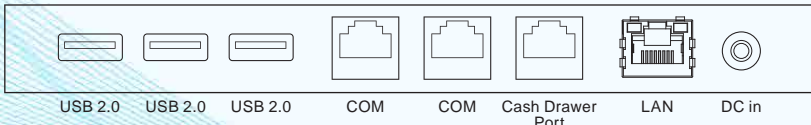

x5POS Standard Type
3 x USB | 2 x COM | 1 x Cash drawer port
1 x LAN

Optional Accessories



11.6" / 15.6" Customer Display with Accessories*




VFD Customer Display



Wireless + Bluetooth



2D Barcode Reader



MSR Reader



Printer



RFID / Fingerprint Reader



Mounting Options



VESA Mount



Wall Mount



Wall Mount with Printer

* Customer display with accessories is by special order only.



SPECIFICATIONS

	x5C J64	x5C T316
PROCESSOR	Intel Celeron J6412 2.0 GHz (Turbo Boost up to 2.6 GHz)	Intel Dual Core i3-1215U 1.2 GHz (Turbo Boost up to 4.4 GHz)
SYSTEM MEMORY	8 GB DDR4 RAM	8 GB DDR4 RAM
STORAGE DEVICE	1 x removable M.2 PCIe 2280 SSD	1 x removable M.2 PCIe 2280 SSD

DISPLAY

SIZE / RESOLUTION	15.6" TFT LCD (LED backlight) / Full HD 1920 x 1080 pixels
BRIGHTNESS	300 cd/m ²
TOUCH SCREEN PANEL	On-cell projected capacitive touch (10mm ultra-thin panel)

I/O INTERFACE

USB PORT	5 x USB 2.0, 1 x USB 3.0 (side)
SERIAL PORT	2 x RJ50
AUDIO PORT	2 x built-in speakers / 2 x 2 W
CASH DRAWER	1 x RJ12 (24 V)
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps

OPERATING SYSTEM

WINDOWS	10 IoT / 10 Pro / 11 IoT / 11 Pro
LINUX	Kernel 3.0 up

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	379 (W) x 232-431 (H) x 246 (D) mm 4.0 kg
CHASSIS MATERIAL	Aluminium die-cast
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	10% to 90% (non-condensing)
POWER CONSUMPTION	19 V / 3.15 A, external power adaptor, 100-240 V, 50/60 Hz 19 V / 6.31 A, external power adaptor, 100-240 V, 50/60 Hz (printer integrated)

MODEL OPTIONS

INTEGRATED READERS	3-track MSR, Fingerprint reader, RFID (13.56 MHz), 2D barcode reader
CUSTOMER DISPLAY	11.6" / 15.6" FHD LCD or 2-line VFD
WIRELESS LAN	Integrated Dual Band Wi-Fi 802.11 b/g/n/ac (2x2 MIMO) + Bluetooth 4.1
COLOURS	Dark Grey (standard) White (optional)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au

SENIOR
TOUCH SCREEN SOLUTIONS

Quality. Safety. Versatility.