

SPC

Industrial Stainless PC



Stainless Steel
SUS 304 Chassis



Waterproof Circular Connectors




IP66 Certification
Fanless & Ventless

SE NOR

SPC T318/T518/T718 (18")


Dimensions

441 x 269.7 x 53.5 mm

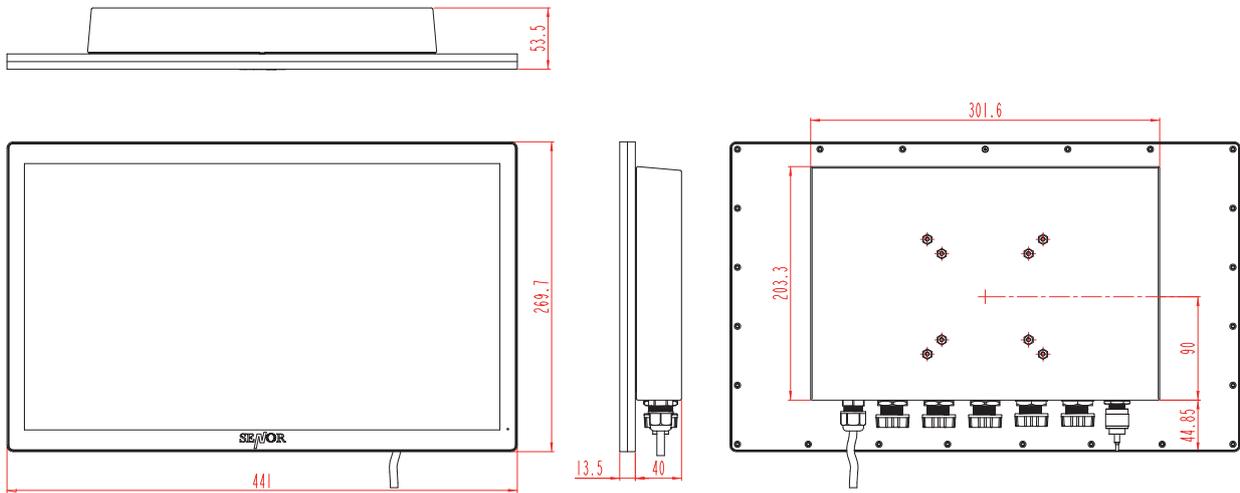


VESA Mount

75 x 75 & 100 x 100 mm

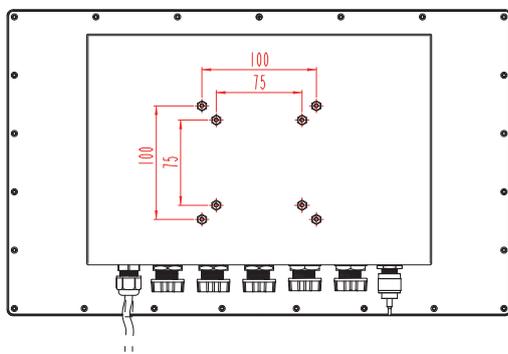

I/O Placement

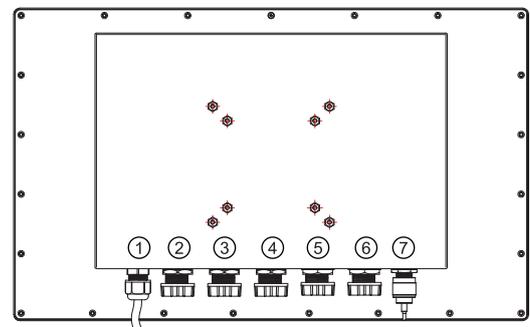


- ① POWER ② ③ LAN ④ ⑤ USB
- ⑥ COM ⑦ WLAN



SPC T321/T521/T721 (21")


Dimensions

518 x 320 x 68 mm

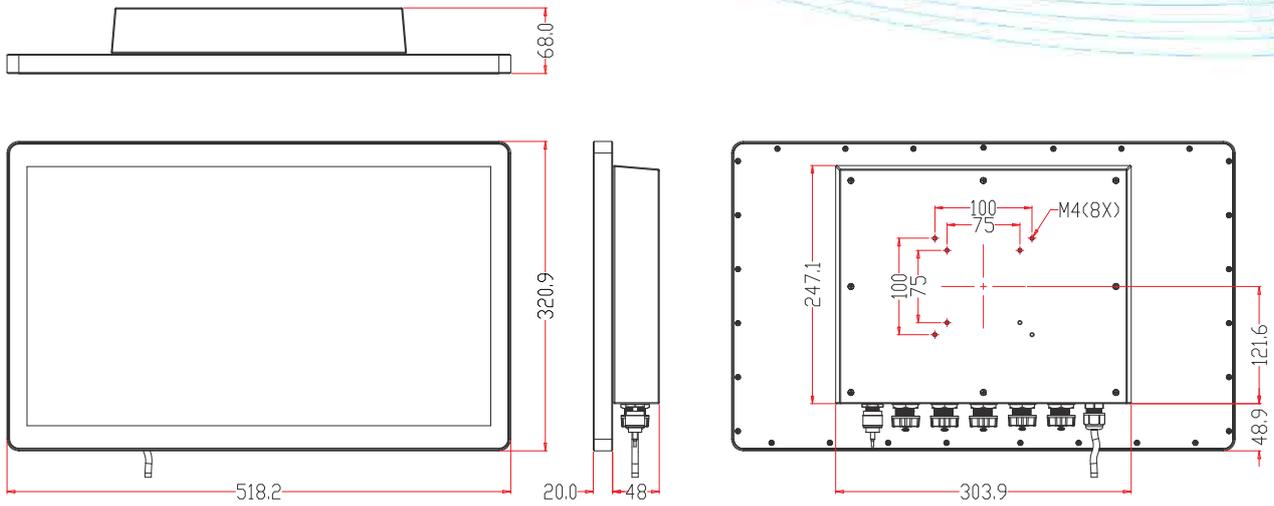


VESA Mount

75 x 75 & 100 x 100 mm

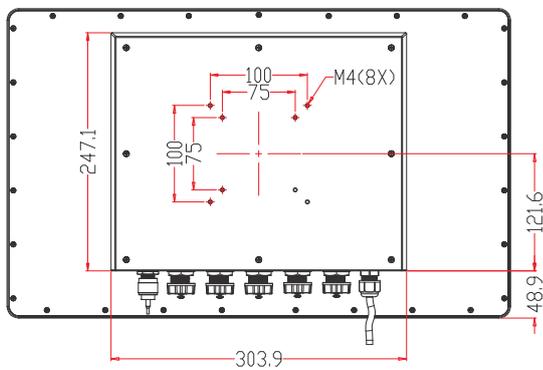


I/O Placement

WLAN: 1
LAN: 2,3
USB: 4,5
COM: 6
Power: 7

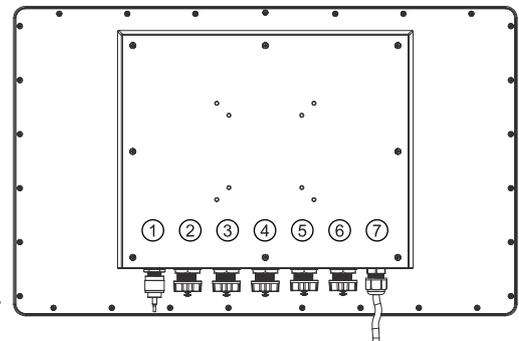

- ① WLAN
- ② ③ LAN
- ④ ⑤ USB
- ⑥ COM
- ⑦ POWER

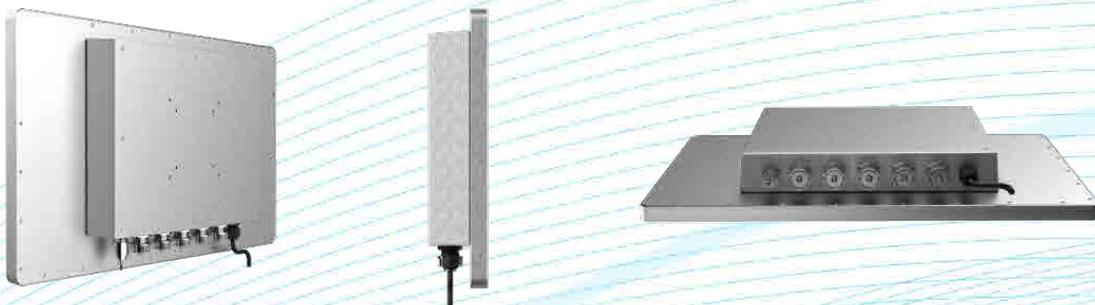



SPECIFICATIONS

SPC T318 | SPC T321

SPC T518 | SPC T521

SPC T718 | SPC T721

PROCESSOR	Intel Core i3-1215U (10M Cache, up to 4.40 GHz)	Intel Core i5-1235U (12M Cache, up to 4.40 GHz)	Intel Core i7-1255U (12M Cache, up to 4.70 GHz)
SYSTEM MEMORY	8 GB DDR4 RAM (up to 32 GB)		
STORAGE	1 x 128 GB PCIe Gen4x4 NVMe M.2 2280 SSD 1 x PCIe Gen4x4 M.2 2280 expansion socket, supports RAID 0/1		

DISPLAY

SIZE & RESOLUTION	18" TFT LCD / 1920 x 1080 pixels 21.5" TFT LCD / 1920 x 1080 pixels
BRIGHTNESS	18" : 350 cd/m ² 21.5" : 250 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (10-point, multi-touch)

I/O INTERFACE

USB PORT (WATERPROOF)	3 x USB 2.0 (up to 5 x USB 2.0)
SERIAL PORT (WATERPROOF)	1 x DB9 (up to 4 x DB9)
ETHERNET PORT (WATERPROOF)	1 x RJ45 10/100/1000 Mbps (up to 2)

OPERATING SYSTEM

WINDOWS	10 IoT / 10 Pro / 11 IoT / 11 Pro
---------	-----------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	18": 441 (W) x 269.7 (H) x 53.5 (D) mm 7 kg 21.5": 518 (W) x 320 (H) x 68 (D) mm 9 kg
CHASSIS MATERIAL	SUS 304 stainless steel
VESA PATTERN	75 x 75 mm / 100 x 100 mm
IP RATING	IP66 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C Customised: -10°C to 50°C
HUMIDITY	10% to 90% (non-condensing)
POWER CONSUMPTION	DC output: 19 V / 3.78 A 72 W (max.) AC input: 100 V-240 V

MODEL OPTIONS

WIRELESS LAN	Wi-Fi 802.11 a/b/g/n/ac/ax/be
CUSTOMISED I/O PORTS	2 x USB 2 x LAN 1 x Serial

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au

SENIOR
TOUCH SCREEN SOLUTIONS

Quality. Safety. Versatility.